


RevNo	Revision note	Date
△		
△		
△		

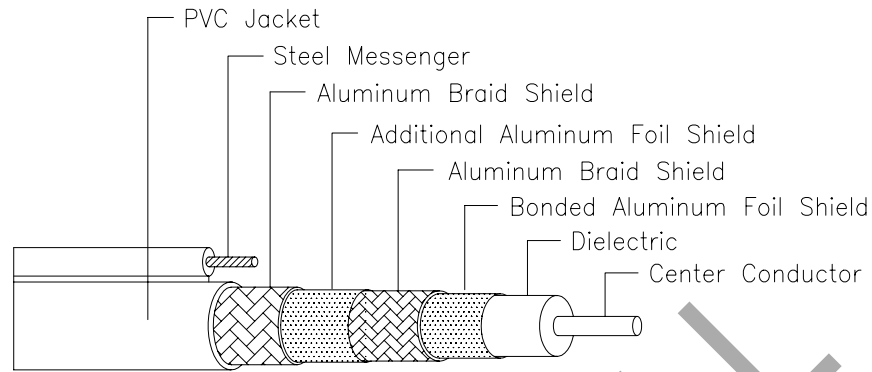

ELECTRICAL PROPERTIES :

Impedance : 75.0 ±3.0 Ohms

Velocity of propagation : 82.0% Nominal

Capacitance Conductor to Shield : 16.2 pF/ft (53.1 pF/m) Nominal

ATTENUATION : @ 68 °F (20 °C)

@ Frequency MHz	dB/100 ft. (MAX.)	dB/100 meters (MAX.)
5 MHz	0.36 dB	1.18 dB
55 MHz	0.95 dB	3.12 dB
211 MHz	1.81 dB	5.95 dB
250 MHz	1.98 dB	6.50 dB
270 MHz	2.06 dB	6.76 dB
300 MHz	2.17 dB	7.12 dB
330 MHz	2.29 dB	7.51 dB
350 MHz	2.36 dB	7.74 dB
400 MHz	2.53 dB	8.30 dB
450 MHz	2.69 dB	8.83 dB
500 MHz	2.85 dB	9.35 dB
550 MHz	3.01 dB	9.88 dB
600 MHz	3.16 dB	10.37 dB
750 MHz	3.58 dB	11.75 dB
870 MHz	3.90 dB	12.80 dB
1000 MHz	4.23 dB	13.88 dB

CONSTRUCTION DETAILS

CENTER CONDUCTOR :

14AWG Copper-Clad Steel
Nominal Diameter 0.064" (1.63 mm)

DIELECTRIC :

Gas Expanded Polyethylene
Nominal Diameter Over Dielectric : 0.280" (7.11 mm)

SHIELD :

1st Shield : Aluminum-Polypropylene-Aluminum
Laminated Tape with Overlap Bonded to the Dielectric
Nominal Diameter Over Tape : 0.286" (7.26 mm)

2nd Shield : Aluminum Braid Wire 60% Coverage

3rd Shield : Non-Bonded Foil Shield

4th Shield : Aluminum Braid Wire 40% Coverage


JACKET :

Flame Retardant PVC Jacket
Nominal Diameter Over Jacket : 0.405" (10.29 mm)
Nominal Jacket Thickness : 0.033" (0.83 mm)

MESSANGER :

Nominal Diameter of Messenger : 0.072" (1.83 mm)
Minimum Breaking Strength : 365 lbs. (166 kg)
Nominal Diameter Overall Jacket for Messenger : 0.157" (4.00 mm)
Nominal Jacket Thickness for Messenger : 0.043" (1.08 mm)

LISTING AND RATINGS : UL TYPE CATV

Designed by - date	Checked by - date	Approved by - date	Date 13/08/2009	Size A4	Scale -
 HOSIWELL TECHNOLOGY CO., LTD.			Part Name CATV/MATV Coaxial Drop Cable	Unit -	
			Part No. C-RG11-QS-M	Issued 1	
			Ref. No.	Sheet 1 of 1	
			Used On.		