


RevNo	Revision note	Date
△		
△		
△		

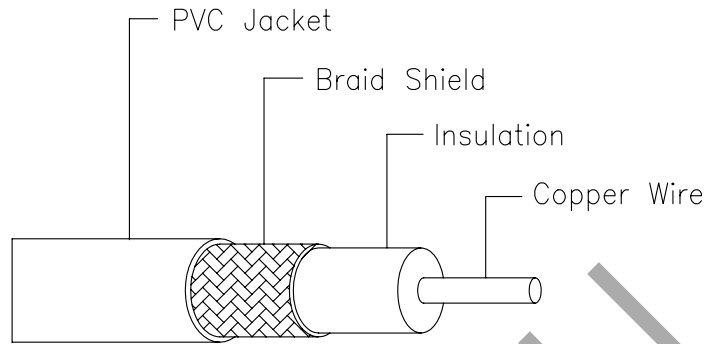

ELECTRICAL PROPERTIES :
 Impedance : 50 Ohms
 Capacitance Conductor to Shield : 100 pF/m

ATTENUATION : @ 68 °F (20 °C)

@ Frequency MHz	dB/km
1 MHz	4 dB
10 MHz	14 dB
30 MHz	24 dB
200 MHz	65 dB

CONSTRUCTION DETAILS


CENTER CONDUCTER :
 9AWG (1/2.90mm) Solid Bare Copper Wire

INSULATION : PE
 Nominal Diameter Over Insulation : 9.70 mm
 Nominal Insulation Thickness : 3.40 mm

SHIELD :
 Bare Copper Wire Braid Shield 95% Coverage

JACKET : PVC
 Nominal Diameter Over Jacket : 13.10 mm
 Nominal Jacket Thickness : 1.45 mm

LISTING AND RATINGS : UL TYPE AWM

Designed by - date	Checked by - date	Approved by - date	Date 25/09/2009	Size A4	Scale -
 HOSIWELL TECHNOLOGY CO., LTD.			Part Name JIS COAXIAL CABLE	Unit -	
			Part No. 10D-2V	Issued 1	
			Ref. No.	Sheet	
			Used On.	1 of 1	