


RevNo	Revision note	Date
△1		
△2		
△3		

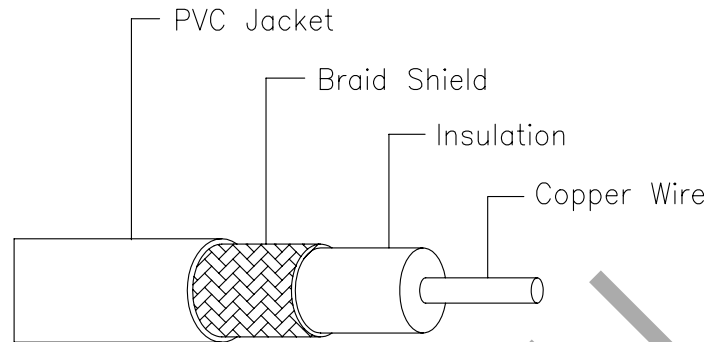

**ELECTRICAL PROPERTIES :**

Impedance : 50 Ohms

Capacitance Conductor to Shield : 100 pF/m

**ATTENUATION : @ 68 °F (20 °C)**

@ Frequency MHz	dB/km
1 MHz	7 dB
10 MHz	27 dB
30 MHz	46 dB
200 MHz	125 dB

**CONSTRUCTION DETAILS**

**CENTER CONDUCTER :**

15AWG (1/1.45mm) Solid Bare Copper Wire

**INSULATION : PE**

Nominal Diameter Over Insulation : 4.80 mm

Nominal Insulation Thickness : 1.70 mm

**SHIELD :**


Bare Copper Wire Braid Shield 95% Coverage

**JACKET : PVC**

Nominal Diameter Over Jacket : 7.30 mm

Nominal Jacket Thickness : 1.00 mm

LISTING AND RATINGS : UL TYPE AWM

Designed by - date	Checked by - date	Approved by - date	Date 25/09/2009	Size A4	Scale -
 <b>HOSIWELL TECHNOLOGY CO., LTD.</b>			Part Name	JIS COAXIAL CABLE	Unit -
			Part No.	5D-2V	Issued 1
			Ref. No.		Sheet
			Used On.		1 of 1