


RevNo	Revision note	Date
△		
△		
△		

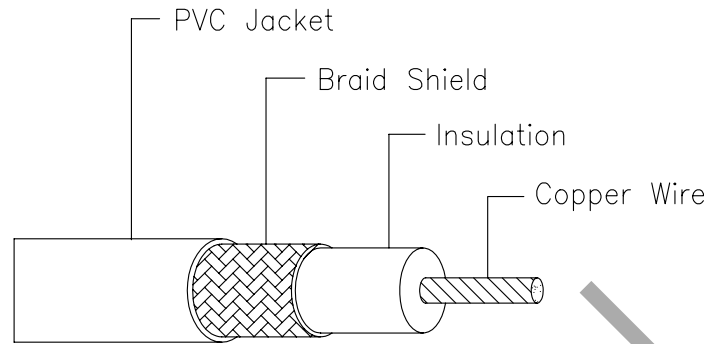

ELECTRICAL PROPERTIES :

Impedance : 50 Ohms

Capacitance Conductor to Shield : 100 pF/m

ATTENUATION : @ 68 °F (20 °C)

@ Frequency MHz	dB/km
1 MHz	6 dB
10 MHz	20 dB
30 MHz	35 dB
200 MHz	95 dB

CONSTRUCTION DETAILS

CENTER CONDUCTER :

12AWG (7/0.80mm) Stranded Bare Copper Wire

INSULATION : PE

Nominal Diameter Over Insulation : 7.80 mm

Nominal Insulation Thickness : 2.70 mm

SHIELD :


Bare Copper Wire Braid Shield 95% Coverage

JACKET : PVC

Nominal Diameter Over Jacket : 11.10 mm

Nominal Jacket Thickness : 1.40 mm

LISTING AND RATINGS : UL TYPE AWM

Designed by - date	Checked by - date	Approved by - date	Date 25/09/2009	Size A4	Scale -
 HOSIWELL TECHNOLOGY CO., LTD.			Part Name JIS COAXIAL CABLE	Unit -	
			Part No. 8D-2V	Issued 1	
			Ref. No.	Sheet 1 of 1	
			Used On.		