


RevNo	Revision note	Date
△		
△		
△		

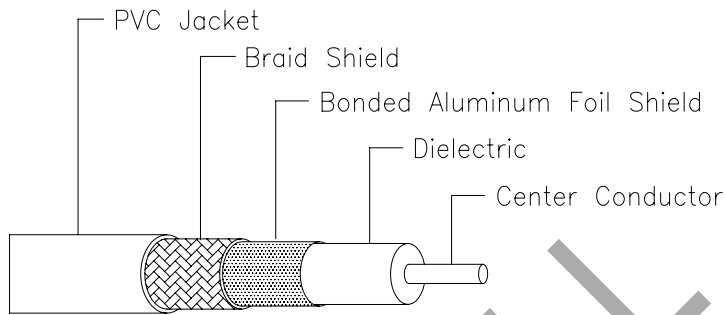

ELECTRICAL PROPERTIES :
 Impedance : 75 Ohms
 Capacitance Conductor to Shield : 56 pF/m

ATTENUATION : @ 68 °F (20 °C)

◎ Frequency MHz	dB/km (MAX.)
90 MHz	34 dB
220 MHz	57 dB
470 MHz	91 dB
770 MHz	124 dB
1000 MHz	148 dB
1300 MHz	177 dB
1550 MHz	200 dB
1770 MHz	220 dB

CONSTRUCTION DETAILS


CENTER CONDUCTOR :
 2.05mm Solid Bare Copper Wire

DIELECTRIC :
 Gas Expanded Polyethylene
 Nominal Diameter Over Dielectric : 9.40 mm

SHIELD :
 1st Shield : Aluminum Mylar Tape with Overlap Bonded
 2nd Shield : Tinned Copper Wire Braid Shield 95% Coverage

JACKET : PVC
 Nominal Diameter Over Jacket : 13.10 mm
 Nominal Jacket Thickness : 1.50 mm

LISTING AND RATINGS : UL TYPE AWM

Designed by - date	Checked by - date	Approved by - date	Date 25/09/2009	Size A4	Scale -
 HOSIWELL TECHNOLOGY CO., LTD.			Part Name JIS Coaxial Cable	Unit -	
			Part No. 10C-FB	Issued 1	
			Ref. No.	Sheet	
			Used On.	1 of 1	