


RevNo	Revision note	Date
△		
△		
△		

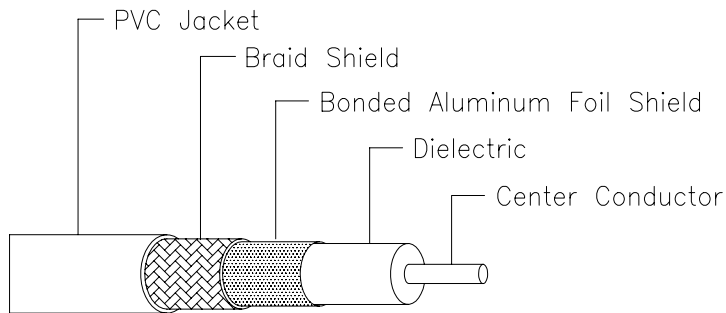

ELECTRICAL PROPERTIES :
 Impedance : 75 Ohms
 Capacitance Conductor to Shield : 56 pF/m

ATTENUATION : @ 68 °F (20 °C)

@ Frequency MHz	dB/km
1 MHz	-
10 MHz	-
30 MHz	-
220 MHz	160 dB
770 MHz	320 dB

CONSTRUCTION DETAILS


CENTER CONDUCTOR :
 0.65mm Solid Bare Copper Wire

DIELECTRIC :
 Gas Expanded Polyethylene
 Nominal Diameter Over Dielectric : 3.10 mm

SHIELD :
 1st Shield : Aluminum Mylar Tape with Overlap Bonded
 2nd Shield : Bare Copper Wire Braid Shield 95% Coverage

JACKET : PVC
 Nominal Diameter Over Jacket : 5.40 mm
 Nominal Jacket Thickness : 0.83 mm

LISTING AND RATINGS : UL TYPE AWM 1354 VW-1

Designed by - date	Checked by - date	Approved by - date	Date 13/11/2009	Size A4	Scale -
 HOSIWELL TECHNOLOGY CO., LTD.			Part Name JIS Coaxial Cable	Unit -	
			Part No. 3C-FV	Issued 1	
			Ref. No.	Sheet	
			Used On.	1 of 1	