


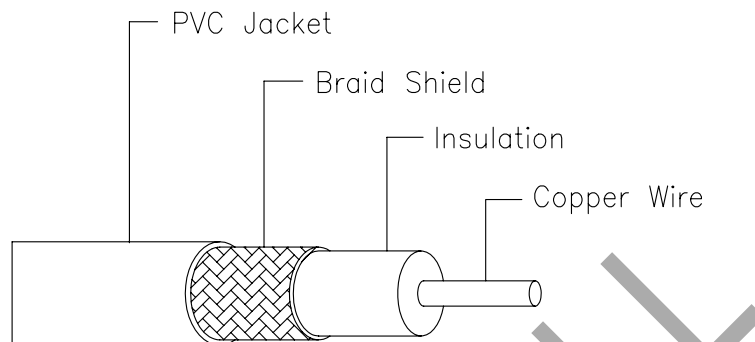

CONSTRUCTION DETAILS

CENTER CONDUCTER :

24AWG (1/0.53mm) Solid Bare Copper Wire

INSULATION : PE

Nominal Diameter Over Insulation : 3.10 mm

Nominal Insulation Thickness : 1.30 mm

SHIELD :

Bare Copper Wire Braid Shield 95% Coverage

JACKET : PVC

Nominal Diameter Over Jacket : 5.40 mm

Nominal Jacket Thickness : 0.90 mm

LISTING AND RATINGS : UL TYPE AWM

ELECTRICAL PROPERTIES :

Impedance : 75 Ohms

Capacitance Conductor to Shield : 67 pF/m

ATTENUATION : @ 68 °F (20 °C)

@ Frequency MHz	dB/km
1 MHz	13 dB
10 MHz	43 dB
30 MHz	75 dB
200 MHz	200 dB

RevNo	Revision note	Date
△		
△		
△		

Designed by - date	Checked by - date	Approved by - date	Date	Size	Scale
			25/09/2009	A4	-
 HOSIWELL TECHNOLOGY CO., LTD.		Part Name			Unit
		JIS COAXIAL CABLE			-
		Part No.			Issued
		3C-2V			1
		Ref. No.			Sheet
		Used On.			1 of 1