


1 2 3 4 5 6 7 8

| RevNo | Revision note | Date |
|-------|---------------|------|
| ▲ | | |
| ▲ | | |
| ▲ | | |

A

A

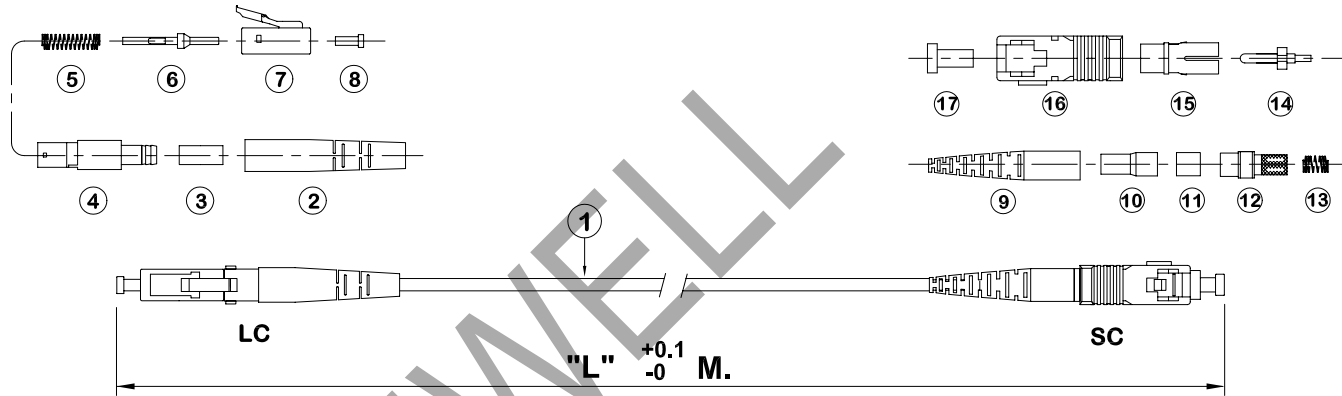

B

B

C

C

NOTE:

1. Actual Attenuation Supplied on Test Result Sheet per Individually Packed Assembly
2. CABLE INFO :
 - Fiber Type could be Singlemode and Multimode Simplex
 - Core/Cladding/Buffering Diameter : 62.5/125, 50/125, 9/125µm
 - Flame Resistance : UL-1666 (for riser and general building applications)
3. LC-SC Connector INFO :
 - Ferrule Type: Ceramic

40108-LL-Xn

LL : Fiber Length

Xn : Fiber Type (Example : 06 means OM1 62.5/125 µm; 05 means OM2 50/125 µm;

05a means OM3 50/125 µm aqua color; 09 means OS1 9/125 µm)

| 17 | DUST CAP | 1 | PC. |
|------|--------------------|-----|------|
| 16 | HOUSING | 1 | PC. |
| 15 | PLUG FRAME | 1 | PC. |
| 14 | FERRULE | 1 | PC. |
| 13 | SPRING | 1 | PC. |
| 12 | STOP RING | 1 | PC. |
| 11 | RING | 1 | PC. |
| 10 | CRIMP EYELET | 1 | PC. |
| 9 | STRAIN RELIEF BOOT | 1 | PC. |
| 8 | DUST CAP | 1 | PC. |
| 7 | HOUSING | 1 | PC. |
| 6 | FERRULE | 1 | PC. |
| 5 | SPRING | 1 | PC. |
| 4 | SPRING BACK HOLD | 1 | PC. |
| 3 | CRIMP EYELET | 1 | PC. |
| 2 | STRAIN RELIEF BOOT | 1 | PC. |
| 1 | FIBER OPTIC CABLE | 1 | PC. |
| ITEM | DESCRIPTION | QTY | UNIT |

D

D

E

E

F

F

| | | | | | |
|------------------|-------------------|--------------------|------------|------|-------|
| Designed by date | Checked by - date | Approved by - date | Date | Size | Scale |
| | | | 29/09/2009 | A4 | - |


 HOSIWELL TECHNOLOGY CO., LTD.

| | | | |
|-----------|--------------------------------|--------|----|
| Part Name | Fiber Patch Cord LC-SC Simplex | Unit | M. |
| Part No. | 40108-LL-Xn | Issued | 1 |
| Ref. No. | | Sheet | |
| Used On. | | 1 of 1 | |

1 2 3 4 5 6 7 8