


1 2 3 4 5 6 7 8

RevNo	Revision note	Date
△		
△		
△		

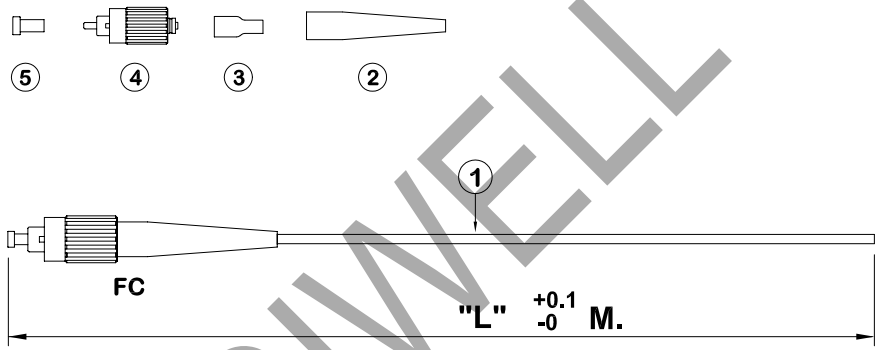


NOTE:

1. Actual Attenuation Supplied on Test Result Sheet per Individually Packed Assembly
2. CABLE INFO :
 - Fiber Type could be Singlemode and Multimode
 - Core/Cladding/Buffering Diameter : 62.5/125, 50/125, 9/125,μm
 - Flame Resistance : UL-1666 (for riser and general building applications)
3. FC Connector INFO :
 - Ferrule Type: Ceramic

40003-LL-Xn
 LL : Fiber Length
 Xn : Fiber Type (Example : 06 means OM1 62.5/125 μm; 05 means OM2 50/125 μm; 05a means OM3 50/125 μm aqua color; 09 means OS1 9/125 μm)

⑤	DUST CAP	1	PC.
④	FC CONNECTOR ASSEMBLY	1	PC.
③	CRIMP EYELET	1	PC.
②	STRAIN RELIEF BOOT	1	PC.
①	FIBER OPTIC CABLE	1	PC.
ITEM	DESCRIPTION	QTY	UNIT

Designed by	date	Checked by	- date	Approved by	- date	Date	29/09/2009	Size	A4	Scale	-
-------------	------	------------	--------	-------------	--------	------	------------	------	----	-------	---

 HOSIWELL TECHNOLOGY CO., LTD.	Part Name	Fiber FC Pigtail	Unit	M.
	Part No.	40003-LL-Xn	Issued	1
	Ref. No.		Sheet	
	Used On.		1 of 1	

1 2 3 4 5 6 7 8