


Computer Cable

Multiconductors Foiled Shielded / Copper Braided Shielded

Overall Foiled shielded and copper braided

UL AWM 2464

80 °C, 300 Volt

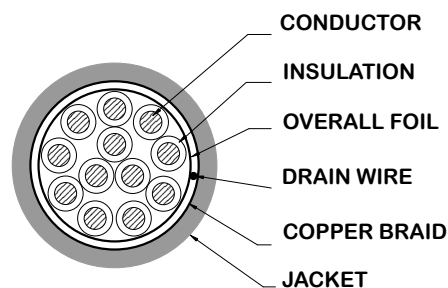

Conductor : Stranded concentric tinned copper

Insulation : 80 °C SRPVC

Shield : 100% coverage, aluminium polyester foil and braid shield

Drain Wire : 7 strands tinned copper

Jacket : Ivory PVC

Application : For computer and peripherals connection use. Passes UL FT1 test.



UL File No. : E131077, CSA File No. : LL 80602
UL Type AWM 2464 and CSA type AWM FT1 Listed)

Standard	No./mm.	AWG	No. of cores	Insulation Diameter	Jacket material	Normal OD.(mm)	Jacket color	Part Number
UL type AWM 2464	7/0.20	24	3	1.10	PVC	4.5	Ivory	CB642403C
	7/0.20	24	4	1.10	PVC	4.7	Ivory	CB642404C
	7/0.20	24	6	1.10	PVC	5.4	Ivory	CB642406C
	7/0.20	24	8	1.10	PVC	5.9	Ivory	CB642408C
	7/0.20	24	9	1.10	PVC	6.3	Ivory	CB642409C
CSA type AWM FT1	7/0.20	24	12	1.10	PVC	7.1	Ivory	CB642412C
	7/0.20	24	16	1.10	PVC	7.7	Ivory	CB642416C
	7/0.20	24	18	1.10	PVC	8.0	Ivory	CB642418C
	7/0.20	24	25	1.10	PVC	9.5	Ivory	CB642425C
	7/0.20	24	37	1.10	PVC	10.8	Ivory	CB642437C

For outdoor use : Double jacket or with steel messenger wire available.