

1 2 3 4 5 6 7 8


RevNo	Revision note	Date
1		
2		
3		

A

A

B

B

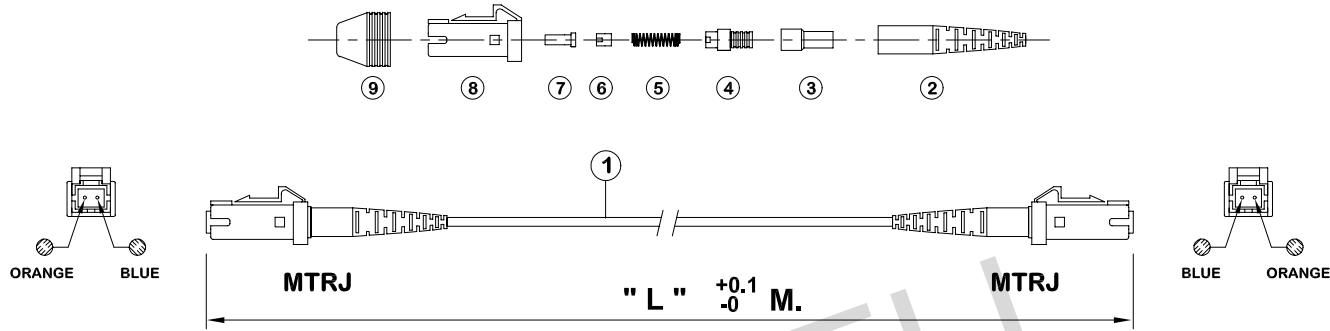

C

C

NOTE:

1. Actual Attenuation Supplied on Test Result Sheet per Individually Packed Assembly
2. CABLE INFO :
 - Fiber Type could be Singlemode and Multimode Duplex
 - Core/Cladding/Buffering Diameter : 62.5/125, 50/125, 9/125µm
 - Flame Resistance : UL-1666 (for riser and general building applications)
3. MTRJ-MTRJ Connector INFO :
 - Ferrule Type: Ceramic

D

D

E

E

F

F

40215-LL-Xn

LL : Fiber Length

Xn : Fiber Type (Example : 06 means OM1 62.5/125 µm; 05 means OM2 50/125 µm;

05a means OM3 50/125 µm aqua color; 09 means OS1 9/125 µm)

9	DUST CAP	2	PCS.
8	HOUSING	2	PCS.
7	FIBER HOLDING	2	PCS.
6	SPRING FRONT HOLD	2	PCS.
5	SPRING	2	PCS.
4	SPRING BACK HOLD	2	PCS.
3	CRIMP EYELET	2	PCS.
2	STRAIN RELIEF BOOT	2	PCS.
1	FIBER OPTIC CABLE	1	PC.
ITEM	DESCRIPTION	Q'TY	UNIT

Designed by	date	Checked by - date	Approved by - date	Date	Size	Scale
				29/09/2009	A4	-

	Part Name	Fiber Patch Cord MTRJ-MTRJ Duplex	Unit	M.
	Part No.	40215-LL-Xn	Issued	1
	Ref. No.		Sheet	
	Used On.		1 of 1	

1 2 3 4 5 6 7 8